


SARAY®

ALUB  ARD


New Collection



Beyaz / White S 9016

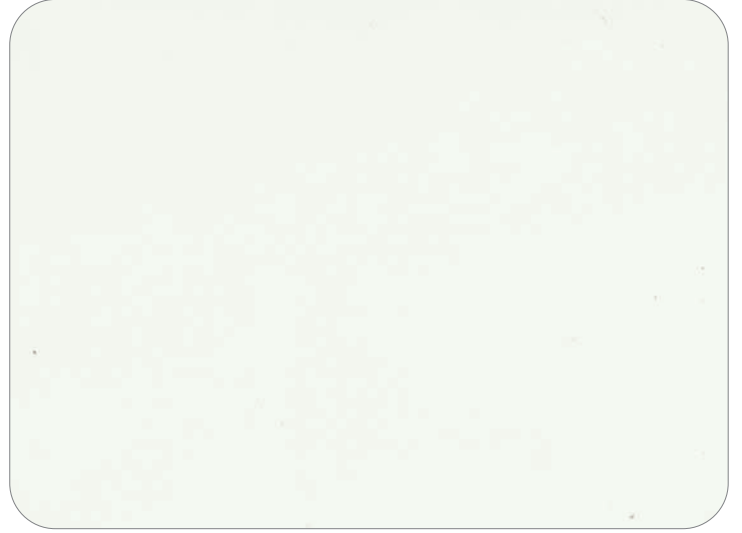

Parlak Beyaz / Bright White SP 9016

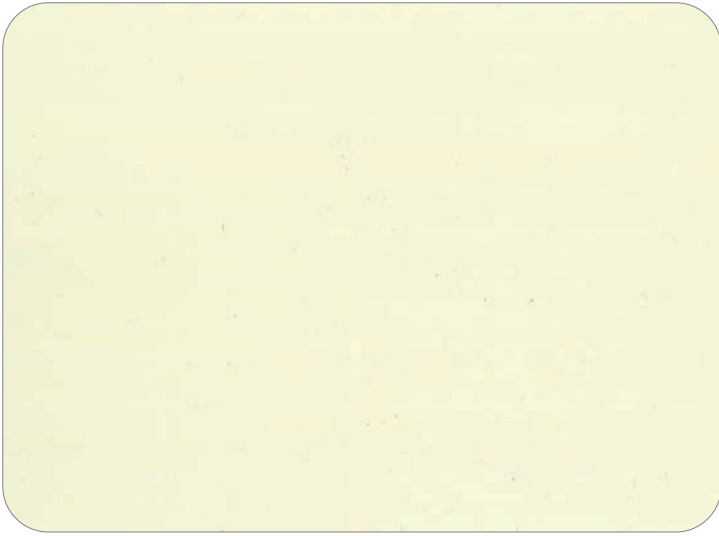

Krem / Cream S 1013



Parlak Krem / Bright Cream SP 1013



Siyah / Black S 9005



Antrasit Gri / Anthracite Grey S 7016



Metalik Gri / Metallic Grey S 9006




Koyu Gri / Dark Silver S 9526




Bronz / Bronze S 580



Bakır / Cooper S 540

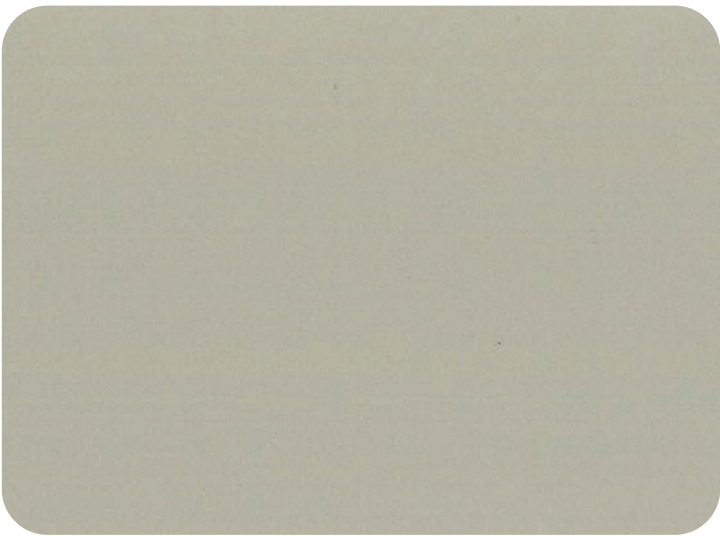


Şampanya / Champagne S 510

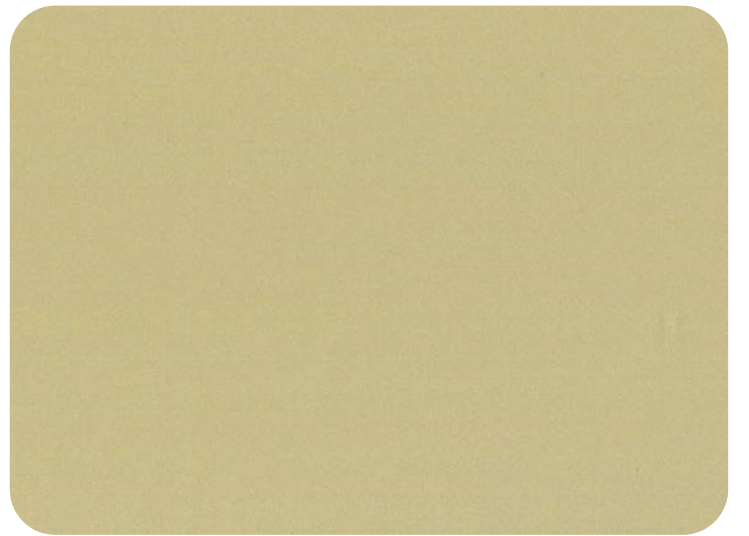

Sarı Metalik / Yellow Metallic S 530



Sarı / Yellow S 1023

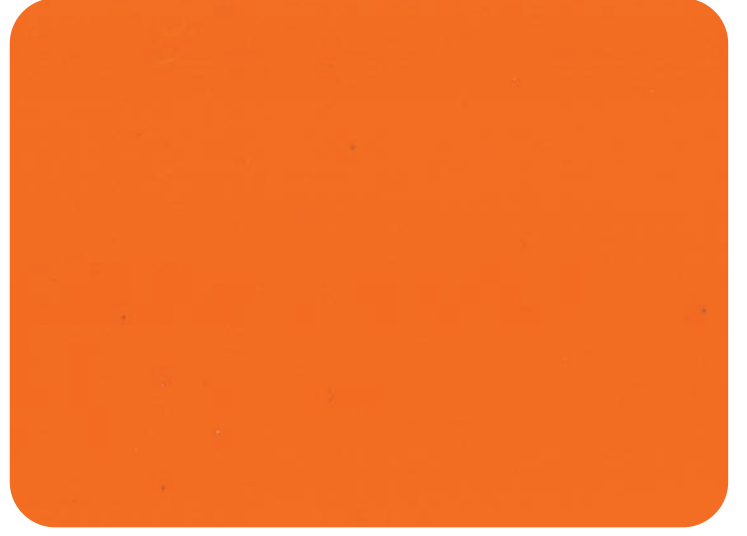

Parlak Turuncu / Shiny Orange S 2004 P



Kırmızı / Red S 3020



Bordo / Claret Red S 3004



Mavi / Blue S 5002



Mat Koyu Kırmızı / Dark Red S 3001



Ceviz / Walnut S 1800

Farklı partilerde üretilen alüminyum kompozit panellerde renk farklılıkları oluşabilir. Paneller, koruma bandı üzerinde yer alan ok yönünde monte edilmelidir. Proje gereksiminiz sonucu statik hesap değerlerini ve teknik verileri karşılayacak özellikte ürün ile alüminyum alt konstrüksiyon ve montaj çözümlerinin kullanılması halinde, normal atmosferik koşullar altında sevkiyat tarihi itibari ile Polyester Boyalı ürünler 15 yıl garantilidir. Boya garanti süreleri ve renk ton değişim değerleri panellerin kullanılacağı lokasyona, boya rengine, boya türüne, katman sayısına ve dokusuna göre değişkenlik göstermekte olup boya çatlama, boya kırılma, boya soyulması ve belirli bir oranın üzerinde renk solması kapsar. Dilediğiniz renk ve parlaklıkta polyester boyalı kompozit panel üretilmektedir. Sipariş esnasında istenilen ürün parlaklığı belirtilmelidir. Temizleme esnasında Potasyum hidroksit, sodyum karbonat ve kostik soda gibi maddeleri, asitli ve aşındırıcı temizlik ürünlerini kullanmayınız.

Color differences may occur between aluminum composite panels that produced in different production batches. The panels should be installed at arrow direction which is stated on protective film. In case of using the appropriate type of ACP, convenient aluminum sub-construction and assembly solutions that will meet your Project's static calculation values and technical data requirements, under normal atmospheric conditions, Polyester Painted products are guaranteed for 15 years that will be valid starting from the shipment date. Guarantee varies according to the location of the project, the color of the panel, the type of paint, number of layers and texture and includes cracking, paint breakage, paint peeling and color fading that is out of tolerance. Do not use highly alkaline cleaning agents such as potassium hydroxide, sodium carbonate or caustic soda, any strong acid products or highly abrasive cleaning agents such as household cleaning products that corrode paint.

*Polyester painted composite panel can be produced in the desired color and brightness. Please do not forget to state Shiny SP **** (RAL CODE) if you require bright PE Coated ACP*



Altın Meşe / Golden Oak S 1810




Teak / Teak S 1865



Koyu Meşe / Dark Oak S 1875



Açık Teak / Light Teak S 1834

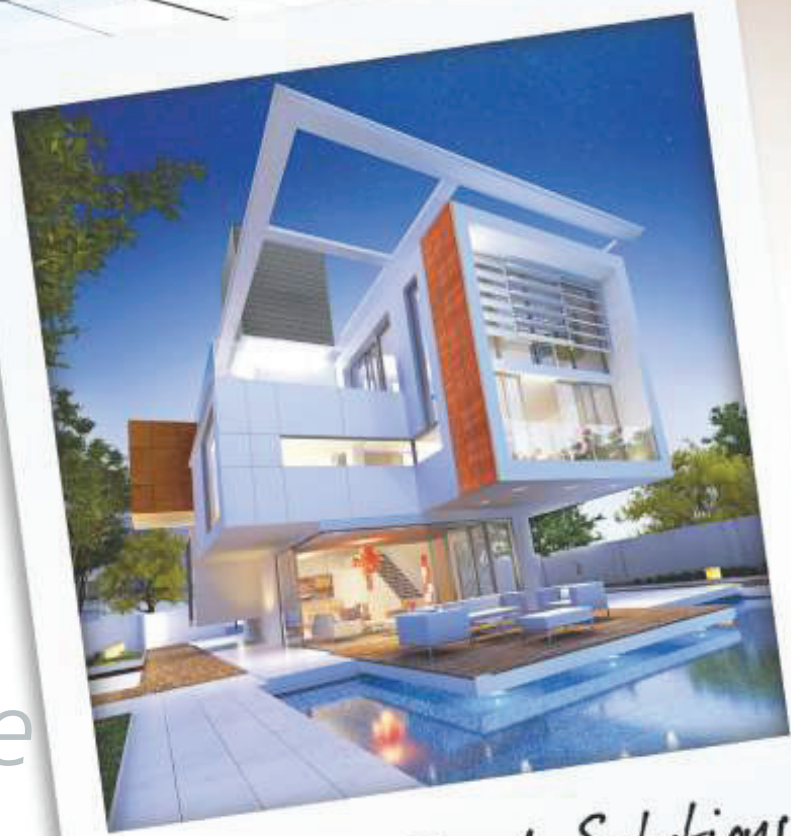

...Realizes the imagination

Aluminum Facade Solutions